



- Compatible for use with Deutsch DT Series Connectors.
- Multiple buss configurations using standard size 16 gold plated contacts.

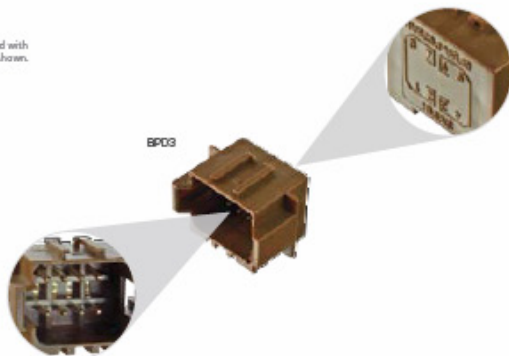

Contact Coating : Gold
Housing Material : ABS Plastic
Contact Size : 16
Max. Current Rating per Contact : 13A
Operating Temperature : 15°C to 100°C



Maximum Current Rating

The maximum current rating is the total amount of current for the entire buss. Current can be distributed in many combinations, but cannot exceed 13Amps per contact.

The first example shows a connector with 1 four pin bus, the second example shows 2 three pin busses. A total of 13Amps can be pulled into one pin which is then split between the remaining pins going out. No more than 13Amps can go through any single pin.

Max. Current Rating:


4 Pin Buss = 26Amps










Max. Current Rating:

3 Pin Buss = 13Amps

3 Pin Buss = 13Amps



Bussed Receptacles

	Total Pins	Max. Current Rating	Colour	Part No.	Mating Plug
	4	4 Pin Buss = 26Amps	Black	BPO1	DT06-4S
	8	3 Pin Buss = 13Amps 5 Pin Buss = 26Amps	Blue	BPO2	DT06-08SA DT06-08SB
	8	4 Pin Buss = 26Amps 4 Pin Buss = 26Amps	Brown	BPO3	DT06-08SA DT06-08SB
	8	8 Pin Buss = 52Amps	Black	BPO4	DT06-08SA DT06-08SB
	12	12 Pin Buss = 78Amps	Black	BPO5	DT06-08SA DT06-08SB
	12	6 Pin Buss = 39Amps 6 Pin Buss = 39Amps	Brown	BPO6	DT06-08SA DT06-08SB
	12	3 Pin Buss = 13Amps 3 Pin Buss = 13Amps 3 Pin Buss = 13Amps 3 Pin Buss = 13Amps	Blue	BPO7	DT06-08SA DT06-08SB